


迷你型攜帶式 H. 264 儲存器 Model:GL-D18

台灣製造 CE FCC RoHS 外銷精品

最迷你型隨身 DVR · 震動提示功能 · 支援多種專用專業偽裝型攝影機 · 支援線控器
[部件說明]

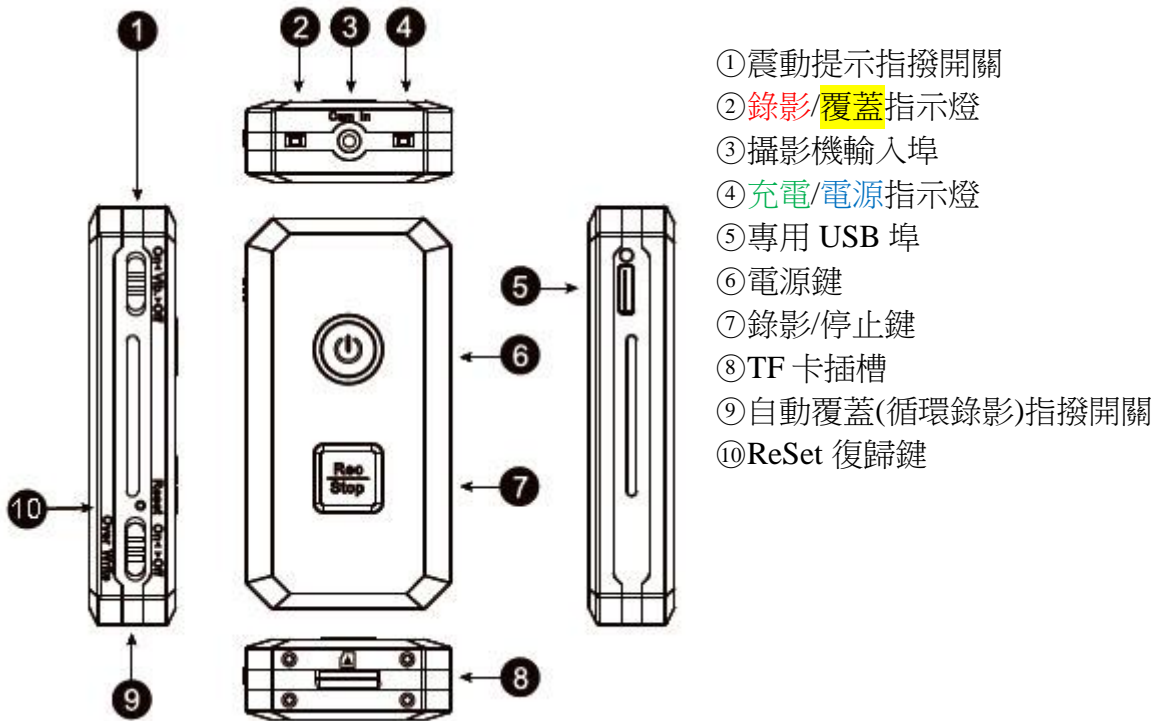

[操作]

準備：插入 TF 卡及接上專用攝影機，Vib 震動提示及 Over Write 自動覆蓋先撥好位置。

開機：長按電源鍵三秒，電源指示燈藍燈到工作指示燈綠燈亮起，表示待機中。

錄影：待機中按一次錄影鍵(Rec/Stop)，燈號由綠燈轉變為紅燈時，進入錄影。

再按一次則存檔，紅燈熄滅變綠燈，回到待機模式。

關機：待機狀態下，長按電源鍵三秒，綠燈先熄，待 3~5 秒藍燈熄關機，此時才能退出記憶卡。

線控器：關機側面插上線控器，向另一方推三秒，開機到自動錄影。存檔關機亦同。

[充電]

充電時指示燈亮綠燈，充飽後綠燈熄，最長充電時間勿超過 5 小時(以 5V1A)

鋰電池完全沒電後或器材存放前，請先充飽電再存放

[日期設定]

一、在根目錄下新增一個 settime.txt 文件檔，內容例如(2017 年 7 月 27 日 8:57:08)


2017.07.27 08:57:08

二、開機錄影，即可寫入設定時間。


三、或在記憶卡根目錄下的 SetTime 資料夾中有個 SetTime.bat 的批次檔，直接執行它，它會自動抓取您目前電腦的時間，好了之後，一樣將卡片插回 DVR 中，開機錄影一段。

Matchbox Size DVR Model: GL-D18

[Description]

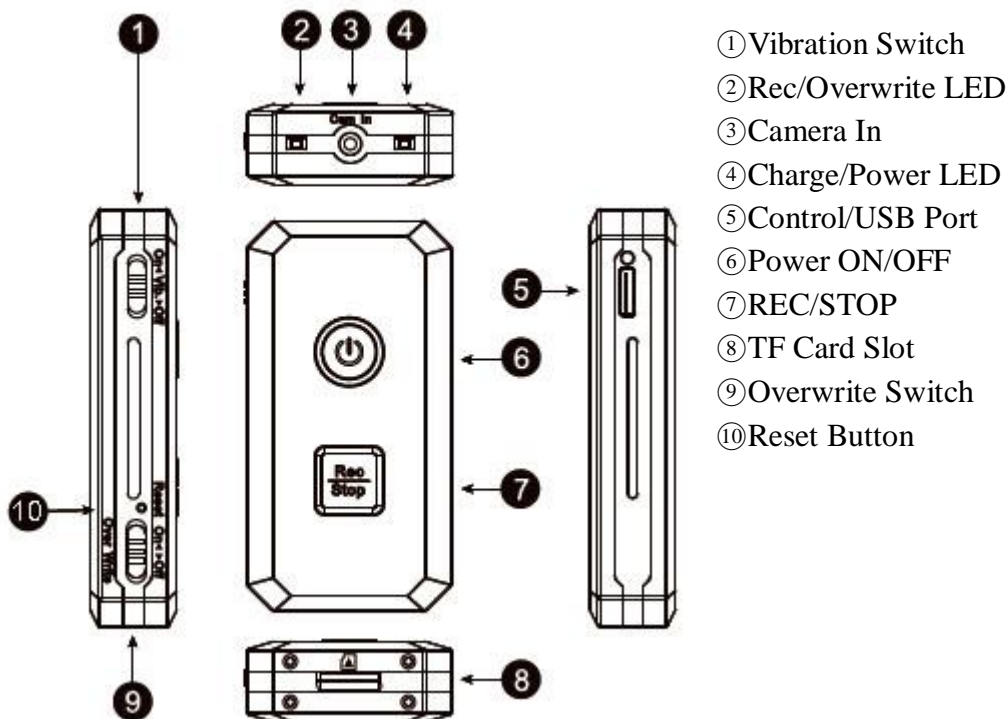


[Battery Charge]

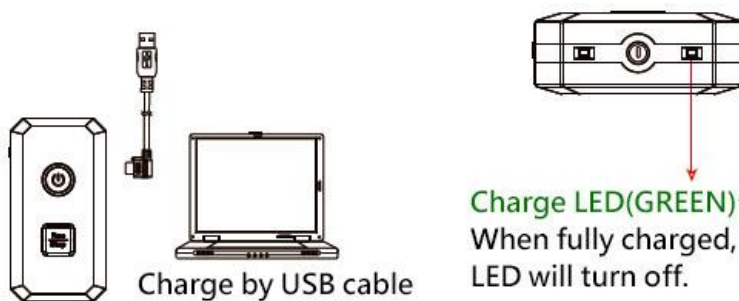

With the DVR powered off, connect USB cable to ⑤ and the other end of the cable to a computer or a USB charger.

When fully charged, the green light will turn off. The device supports 120-150 minutes continuous recording. Every video file is approximately 30 minutes in length.

[Connecting to a Camera]

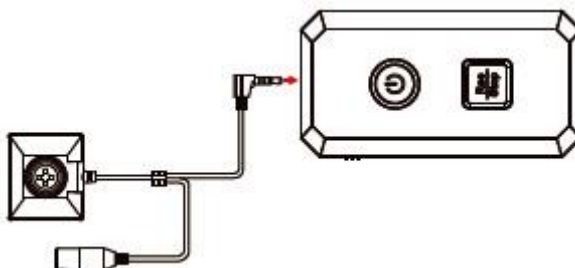

TO connect a camera, plug-in camera jack into ③ on the device.

[Date & Time setting (for Windows system)]

(1)from the desk top right-click to open Notepad, create a text(.txt)file names settime

(2)On the first line of the file, enter date and time information as
year.month.day hours.minutes.seconds.

For example, suppose the times is 2017/2/1; PM08:00, please enter 2017.02.01 20:00:00

(3)Save the file to the root directory of the memory card.

[Operation]

※Please format the memory card on PC before recording.

(1)Sliding the vibration switch ① to turn on/off vibration mode.

(2)Sliding the overwrite switch ⑨ to turn on/off overwrite.

(3)To power on the DVR gently press ⑥ once. **Blue LED** ④ turns on. In vibration mode, DVR vibrates once when it is on.

(4)To record, press ⑦ once. **Red LED** ② turns on.

(Camera must be connected at this moment)

In vibration mode, DVR vibrates 3 times when recording starts.

(5)To stop record, press ⑦ again. LED ② turns off.

(6)Press ⑥ to turn off DVR. LED ④ turns off. In vibration mode, DVR will vibrate 5 times.

Note: The DVR will turn off automatically in 5 seconds if memory card is not placed.

Yellow LED will turn on when overwrite function is enabled.

Made in TAIWAN

[Exhibition center] GREENLEAF Enterprise Co., Ltd.

[Address] No. 388, Chung-Hsiao E. Rd.,Sec6, Taipei City, Taiwan,R.O.C.

[E-Mail]service@taiwan-spy.com

[產地]臺灣

[展示中心]綠廣興業有限公司

[地址]台北市南港區忠孝東路六段 388 號

[E-Mail]service@taiwan-spy.com